


Lab-Line Shakers



Rotators

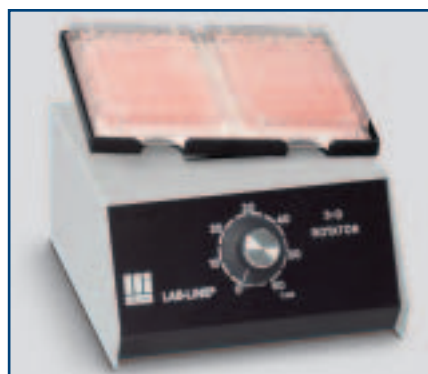

Model 4630

Product Description

- Delivers gentle rocking motion at a 10° angle through a 360° rotation at 30 rpm.
- Rugged powder coated steel body design has minimized footprint to conserve bench top space.

Bi-Directional Economy Model!

- Bi-directional rocking at 10° angle through 360° rotation
- Compact, lightweight design saves valuable bench space
- Fixed speed of 30 rpm
- ☆ 24 Month Warranty

- White platform mat for easy sample viewing.
- 60 minute mechanical timer—use as on/off switch or set for continuous operation.
- White non-skid 6.75" x 5" (17 x 13 cm) platform can hold 2 microwell plates, vacutainers, slides, petri dishes and tissue culture flasks.
- Ideal for serological tests.

ORDERING INFORMATION

Model #	Volts	Amps	Watts	Hz	Platform Dimensions W x D Inches (cm)	Overall Dimensions* Inches (cm)			Shipping Weight Lb. (kg)	US List Price
						W	H	D		
4630 ¹	120	0.3	60	50/60	16 (41) x 14 (36)	16 (41)	7.5 (19)	14 (36)	25 (11)	\$466.00
4630-1 ¹	240	0.3	50	50/60	6.75 (17) x 5 (13)	6.9 (18)	5.5 (14)	8.3 (21)	25 (11)	\$466.00

¹ ETL *Without platform; Platform Dimensions: 6.75" x 5" (17 x 13 cm)
Operating Environment: 4-40°C; 20-80% RH, non-condensing

Speed Range: 30 rpm, Angle of rotation: 10°
Timer min: 0-60, Maximum Load: 3 Lbs (1.4 kg)



Model 4631

Product Description

- Provides gentle bi-directional orbital rotation.
- Variable control.
- Ideal for hybridization blotting procedures or staining and destaining gels.
- Non-skid platform can accommodate 2 Pyrex® utility trays.

Deluxe Bi-Directional Rotator!

- Bi-directional rotation at 6° angle through 360° rotation
- Variable speed controller adjusts from 0 to 25 rpm
- 16" x 14" platform holds utility trays
- ☆ 24 Month Warranty

- Bi-directional horizontal and vertical orbital rotation through a 6° angle.
- Continuous-duty motor and direct drive assembly without belts or pulleys to replace provides reliable long-term performance.
- Stainless steel platform measures 16" x 14" (41 x 36 cm)

ORDERING INFORMATION

Model #	Volts	Amps	Watts	Hz	Platform Dimensions W x D Inches (cm)	Overall Dimensions* Inches (cm)			Shipping Weight Lb. (kg)	US List Price
						W	H	D		
4631 ¹	120	0.4	50	50/60	16 40.6) x 14 (35.6)	13.1 (33)	4.2 (11)	10 (25)	25 (11)	\$972.00
4631-1CE ²	240	0.2	50	50/60	16 40.6) x 14 (35.6)	13.1 (33)	4.2 (11)	10 (25)	25 (11)	\$972.00

¹ ETL, ² CE *Without platform; Platform Dimensions: 16" x 14" (41 x 36 cm)
Operating Environment: 4-40°C; 20-80% RH, non-condensing

Speed Range: 0-25 rpm, Angle of rotation: 6°
Maximum Load: 4 (1.8 kg)