


Harvey Sterilizers



PV Dry™ Steam with Pre/Post-Vacuum

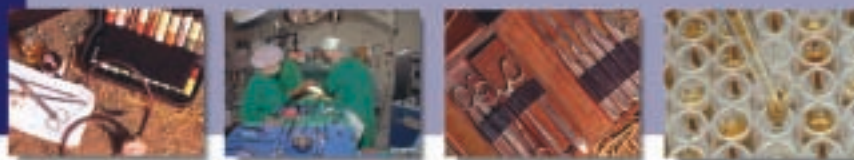

PV Dry



Easy-to-read LCD Display

The New Dry Standard in Sterilization!

- Eliminate risk of instrument recontamination
 - Faster drying times with an average start-to-dry cycle of 35 minutes
 - Guarantee that all pouches and instruments will come out dry
- ☆ 24 Month Warranty

Product Description

- Vacuum-closed-door sterile drying of goods for speed and sterile integrity.
- Patented non-recirculation system means less chamber cleaning time.
- Patented automatic door-closing system eliminates hard-to-close doors.
- Pulsed pre-vacuum for maximum steam penetration.
- Five preset cycles allow simple operation of wrapped, unwrapped, packs, liquid and special cycles.
- Large chamber, yet small foot-print saves valuable counter space.
- Easy connection to printer or data port for validation or record keeping.
- Easy to read LCD display lets you view all parameters.

- Custom programs can be created in lab mode for unique applications.
- Designed, built and tested to the most rigorous performance and safety standards.
- Meets highest national performance expectations, AAMI - ST-55 performance standard, as well as pressure vessel safety standards.
- Custom cast long-life heating element minimizes service and repair cost.
- Five preset cycles allow simple operation of wrapped, unwrapped, packs, liquid, and special cycles.
- Large chamber, yet small footprint saves valuable counter space.
- Easy connection to printer or data port for validation or record keeping.
- Custom programs can be created in lab mode for unique applications.
- Built-in diagnostic system is accessible from front panel for quick service.

PRODUCT SPECIFICATIONS

Overall Dimensions (W x H x D)	19" x 15.5 x 23" (48.3 x 39.4 x 58.4 cm)	Fixed Cycle Parameters	Liquids: 15 min. @ 121°C
Chamber Dimensions	10" diameter, 15.5" depth (25.4 x 39.4 cm)		Unwrapped: 3 min. @ 135°C
Chamber Capacity	.70 cubic feet (20 l)		Wrapped: 5 min. @ 135°C
	.52 cubic feet (15 l) usable space		Packs: 30 min. @ 121°C
			Special: 5 min. @ 134°C
		Accessories included	Rack, 1 large tray, 1 small tray

ORDERING INFORMATION

Model #	Description	Volts	Electrical Amps	Watts	Freq.	Shipping Weight Lb (kg)	US List Price
ST127325	PV Dry Sterilizer	120	11	1320	50/60	140 (63.5)	\$6,750.00
ST127320	PV Dry Sterilizer	230	8.3	2000	50/60	140 (63.5)	\$6,750.00
ST127320-33'	PV Dry Sterilizer	230	7.8	1800	50	140 (63.5)	\$6,750.00
ST127335	PV Dry Sterilizer w/DI	115	11	1320	50/60	142 (64.4)	\$6,950.00
ST127330	PV Dry Sterilizer w/DI	220-240	8.3	2000	50/60	142 (64.4)	\$6,950.00
ST127330-33'	PV Dry Sterilizer w/DI	230	7.8	1800	50	142 (64.4)	\$6,950.00
ST127345	PV Dry Sterilizer w/DI & Kit	115	11	1320	50/60	155 (70.3)	\$7,400.00
ST127340	PV Dry Sterilizer w/DI & Kit	220-240	8.3	2000	50/60	155 (70.3)	\$7,400.00
ST127340-33'	PC Dry Sterilizer w/DI & Kit	230	7.8	1800	50	155 (70.3)	\$7,400.00

' CE marked.

ACCESSORIES

Model #	Description	US List Price	Model #	Description	US List Price
TC1137X2	Temperature Verification Probe	\$137.00	PM20700	Digital Pyrometer	\$349.00
HRX5	Pouch Rack	\$81.10	AY1137X1	Printer Assembly	\$502.00